

PERLA OP 0.95

Inspiring Great Spaces™

Armstrong®

PERLA OP 0.95



PERLA OP 0.95

BOARD

TEGULAR

MICROLOOK 90


SL2




Prelude 24 - XL²/TLX
Prelude 24 Sixty² - XL²/TLX






Prelude 24 - XL²/TLX
Prelude 24 Sixty² - XL²/TLX



Prelude 15 - XL²/TL
Silhouette 6mm - XL²
Interlude HRC - XL²



Prelude 24 + Z bar / Prelude 24 Straight Cut
Prelude 24 Sixty² + Z bar / Prelude 24 Straight Cut



Tiles

600 x 600 x 15 mm	3819 M	5173 M	5174 M
625 x 625 x 15 mm	3819 D	5173 D	5174 D
675 x 675 x 15 mm	3820 M	5175 M	5176 M
1200 x 600 x 15 mm	3821 M	5177 M	5178 M
600 x 600 x 18 mm	2880 M	2882 M	5179 M
625 x 625 x 18 mm	2880 D	2882 D	5179 D
1200 x 600 x 18 mm	2881 M		

Planks


1500 x 600 x 18 mm	3092 M		
1800 x 600 x 18 mm	3093 M		
1500 x 300 x 18 mm			3094 M
1800 x 300 x 18 mm			3096 M



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	α_p
0.95	0.90	0.45	0.80	0.95	0.90	1.00	1.00		
0.95	0.90	0.50	0.85	0.95	0.90	1.00	1.00		
0.95	0.90	0.45	0.85	0.95	0.90	0.95	1.00		

Sound Absorption Class = A

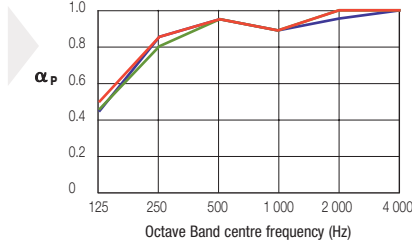

EN ISO 10848-2 & EN ISO 717-1

D_{nfw}	
27 dB (Planks SL2)	
25 dB (Tiles, Planks Board)	



EN ISO 140-3 & EN ISO 717-1

R_w	
12 dB (Tiles 15 mm)	
10 dB (Tiles 18 mm)	



EEA Euroclass A2-s1,d0	
EN 13501-1	

RUS KM1 (G1, V1, D1, T1)	
FZ 123	



EN 12667 & ISO 8301

$\lambda = 0.036$ W/m K (15 mm)
 $\lambda = 0.037$ W/m K (18 mm)



ISO 14644-1

ISO 5



95 % RH



15 YEAR guarantee



30 YEAR system guarantee



2.4 kg/m² (Tiles 15 mm)
2.9 kg/m² (Tiles 18 mm)
3.3 kg/m² (Planks)

*Tiles 15 mm: 52 % - Tiles 18 mm: 36 % - Planks: 18 %

Please contact Armstrong Technical Sales Group for further details.

www.armstrong.eu

Armstrong®