

ULTIMA+

www.armstrong.eu

Armstrong[®]

ULTIMA+



Recycled Content

Light Reflectance

Intelligibility

ULTIMA+


	BOARD	TEGULAR	MICROLOOK 90	VECTOR	SL2	K2C2
	Prelude XL ² /TLX 24 mm Prelude Sixty ² 24 mm	Prelude XL ² /TLX 24 mm Prelude Sixty ² 24 mm	Prelude XL ² /TL 15 mm Silhouette XL ² 15 mm Interlude XL ² 15 mm	Prelude XL ² 24 mm Prelude Sixty ²	Prelude Main Runner 24 mm - Prelude Sixty ² System Z Main Runner 24 mm	System Z
Board & Tiles						
500 x 500 x 19 mm			7673 M			
600 x 600 x 19 mm	7661 M	7664 M	7674 M	7681 M		
625 x 625 x 19 mm	7661 D	7664 D	7674 D	7681 D		
625 x 1250 x 19 mm	7663 D					
675 x 675 x 19 mm	7662 M	7665 M	7675 M			
600 x 1200 x 19 mm	7663 M	7666 M	7677 M			
300 x 1200 x 19 mm			7676 M			
Planks						
300 x 1500 x 19 mm					7699 M	
312.5 x 1500 x 19 mm						7667 D
300 x 1720 x 19 mm					7700 M	
300 x 1800 x 19 mm					7701 M	
312.5 x 1800 x 19 mm						7668 D
300 x 2500 x 19 mm					7702 M	
312.5 x 2500 x 19 mm						7669 D



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	
• Board, Tegular, MicroLook 90									
0.70(H)	0.75	0.40	0.50	0.65	0.85	0.95	1.00		α_p
• Vector									
0.75(H)	0.75	0.35	0.55	0.65	0.80	0.95	0.90		α_p
• SL2, K2C2									
0.65(H)	0.65	0.35	0.45	0.55	0.75	0.90	1.00		α_p

Sound Absorption Class = C

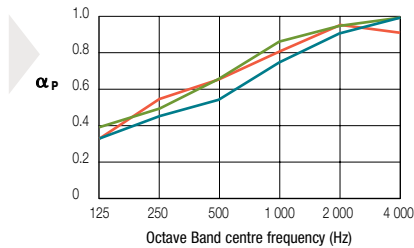

EN ISO 10848-2 & EN ISO 717-1

D_{nfw}
36 dB (Board, Tegular, MicroLook 90)
33 dB (Vector)
40 dB (SL2, K2C2)



EN ISO 140-3 & EN ISO 717-1

R_w
18 dB (Board, Tegular, MicroLook 90)



EEA Euroclass A2-s1, d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667 & ISO 8301

$\lambda = 0.052$ W/m K		95 % RH		ISO 5
-------------------------	--	---------	--	-------



15 YEAR guarantee



30 YEAR system guarantee



5.2 kg/m ² (Board, Tegular, MicroLook)
5.8 kg/m ² (Vector)
5.6 kg/m ² (SL2/K2C2)

Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu

Armstrong